



Quick Turn Fiber Now Available in Standard and Cut Lengths from Stock

ExpressLT™ Dry - Single Mode Dry Loose Tube Cable

Armored (12F-288F) and Non-Armored (12F-288F)

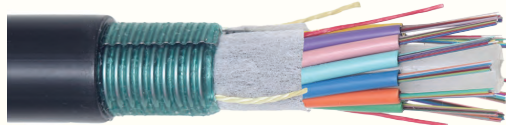



- MDPE Outer Jacket
- Water Blocking Tape
- MDPE Inner Jacket (Double Jacket Designs Only)
- Central Strength Member
- Outer Strength Members (where applicable)
- Dry Buffer Tube Containing up to 12 Fibers
- Ripcord
- ezPREP® Corrugated Steel Armor (optional)



Dry FusionLink™ - Single Mode Ribbon Central Tube (Dry) Cable


Armored (72F-864F)

- MDPE Outer Jacket
- Water Blocking Tape
- Ribbon Stack
- Water Blocking Tape (In tube)
- Dry Water-Blocked Buffer Tube
- Ripcord



Non-Armored (72F-432F)


- Strength Rod
- Ripcord
- Dry Water-Blocked Buffer Tube
- Ribbon Stack
- Water Blocking Tape (In tube)
- Core Water Blocking Tape
- MDPE Outer Jacket



ResiLink™ ADF

Single Mode All-dielectric Flat Drop Cable


- Strength Member
- Water-Blocking Material
- HDPE Outer Jacket
- Gel-Filled Buffer Tube (up to 24 Fibers)



ResiLink™ TF

Single Mode Toneable Flat Drop Cable


- 24 AWG Tracer Wire
- Strength Member
- Water-Blocking Material
- HDPE Outer Jacket
- Gel-Filled Buffer Tube (up to 24 Fibers)



Don't see what you are needing? Our offering is ever-expanding so contact us at Fiber@prioritywire.com with any questions or send us the spec for what you are using and we will get you answers. Scan the QR code above for more info and where you can find full spec sheets.


GenSPEED® - Distribution Indoor-Outdoor Riser & Plenum Rated Cable

Riser (2F-144F) and Plenum (2F-96F) Armored and Non-Armored

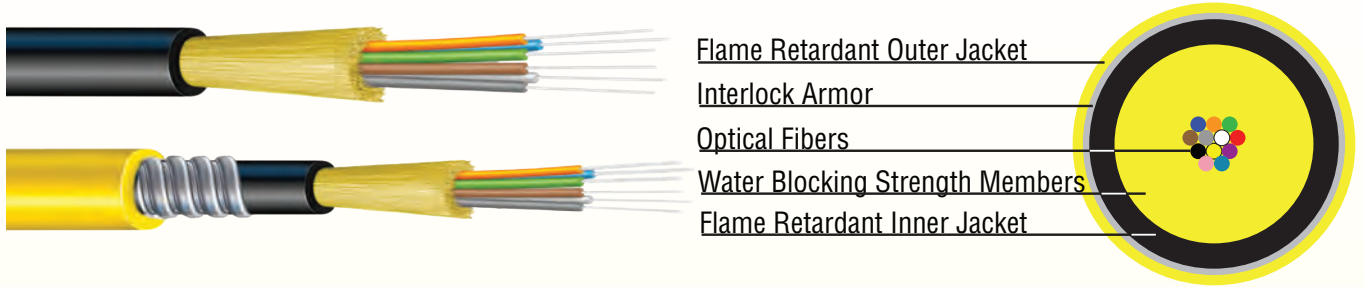

GenSPEED® - Distribution Indoor Riser & Plenum Rated Cable

Riser (2F-144F) and Plenum (2F-96F) Armored and Non-Armored

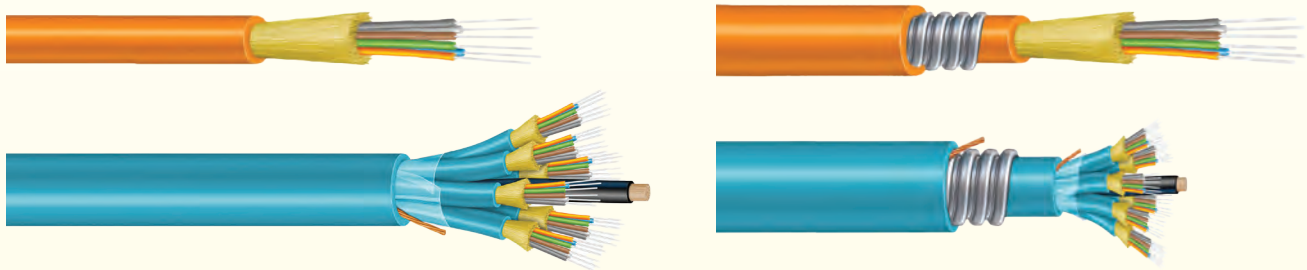

NOW QUOTING ADSS - All-Dielectric Self-Supporting



- Spans up to 2600 feet
- Fiber counts up to 288 loose tube
- Installations up to 274 kV

- HDPE Outer Jacket
- Aramid Strength Yarns
- Inner Jacket Polyethylene (optional)
- Central Strength Member
- Water Blocking Tube
- Gel-Filled Buffer Tube Material
- Ripcord

